

# ULTIMATE LOW-LOSS FIBER CONNECTIVITY



EVERY PATCHCORD IS MASTERCORD PERFORMANCE LEVEL

**A-GRADE  
MPO/APC  
Connector**

## Optical Performance

$IL \leq 0.25\text{dB (max.)}^*$

$RL \geq 65\text{dB (APC)}, \geq 55\text{dB (UPC)}$

\*Without using low-loss MT ferrule


## End-face Geometry

Fiber height: 1500 to 2000nm

FH diff. all < 200nm

FH diff. adj. < 150nm

Geometry limit < 10

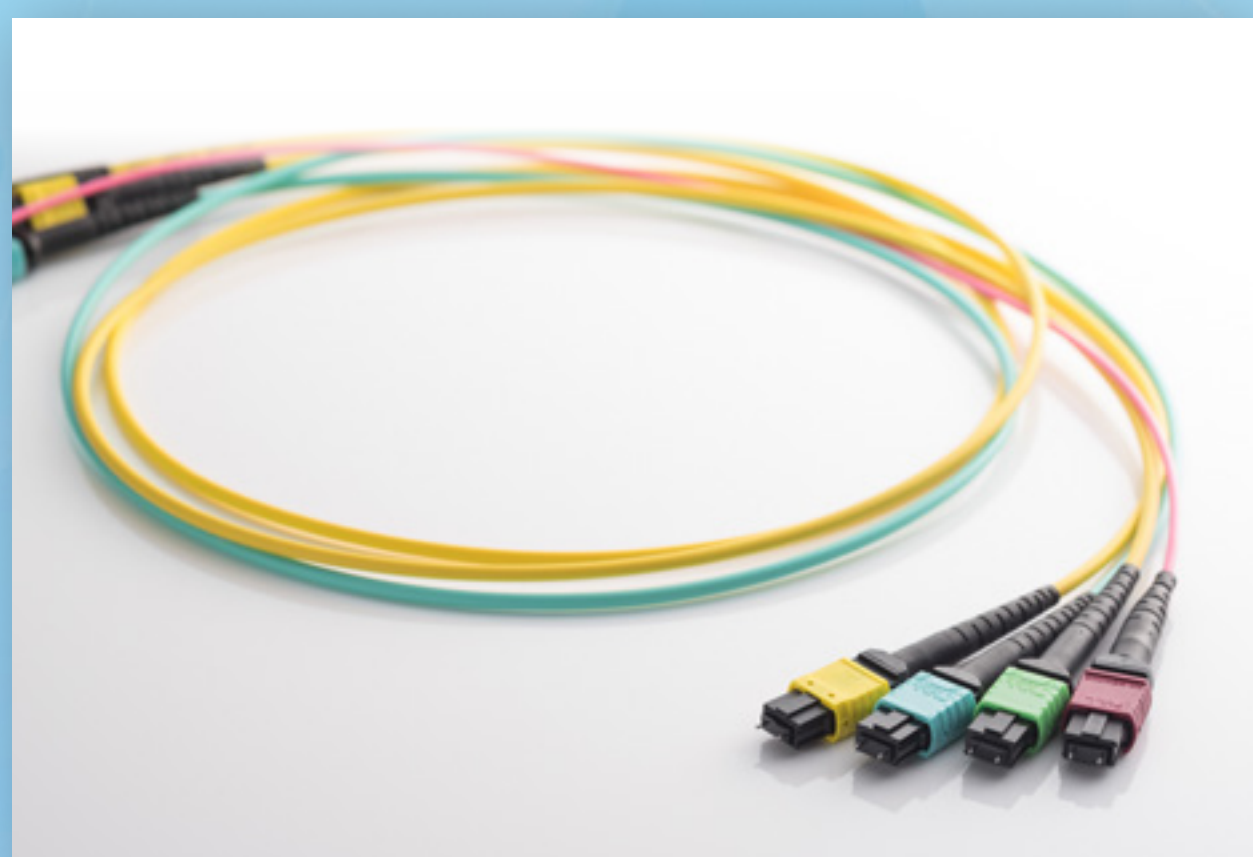

MPO Trunk Cable



MPO Module



MPO Fanout



[sales@xfconnect.com](mailto:sales@xfconnect.com)

[xfconnect.com](http://xfconnect.com)