

ULTIMATE LOW-LOSS FIBER CONNECTIVITY



EVERY PATCHCORD IS MASTERCORD PERFORMANCE LEVEL

**A-GRADE
SC&LC/APC
Connector**




Optical Performance

Random mated IL for 97% $\leq 0.12\text{dB}$
RL $\geq 70\text{dB}$ (APC), $\geq 55\text{dB}$ (UPC)

End-face Geometry

ROC: 7 to 9mm
Apex offset: 0 to $30\mu\text{m}$
Fiber height: -30 to 30nm
APC angle: 7.8° to 8.2°
Key error: -0.2° to 0.2°

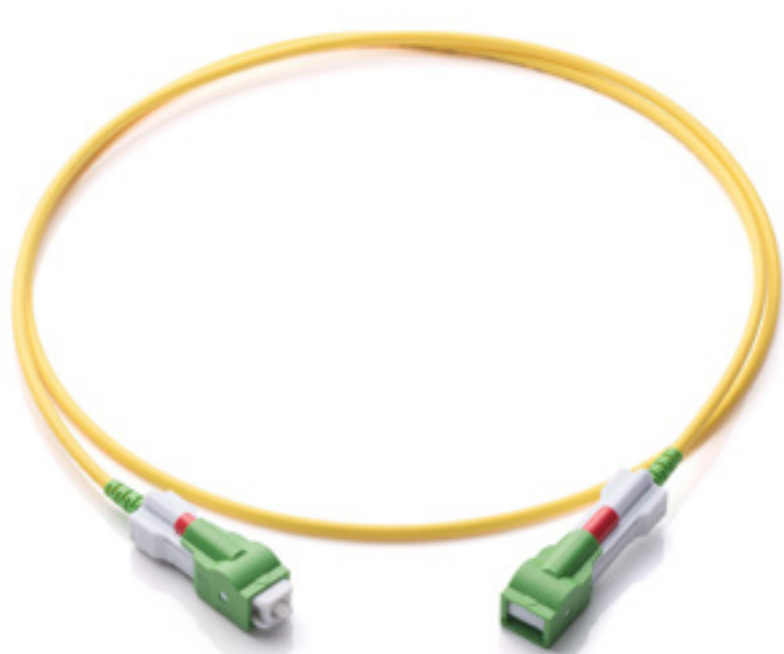

Autoshutter Jumper



High Fanout Number
(288f) & Small Fanout
Length Tolerance (0.5cm)



SC/APC-SUS Jumper



sales@xfconnect.com

xfconnect.com